


COLD PLANER SKID STEER ATTACHMENT



Unique trapezoidal shock wave for greater breaking power



The Hydraulic Breaker makes quick work out of a tough job. The smart and efficient design provides a workhorse with only two moving parts. Vibration and shock are controlled by shock absorbing polymers, minimizing machine wear and sound while improving operator comfort level.

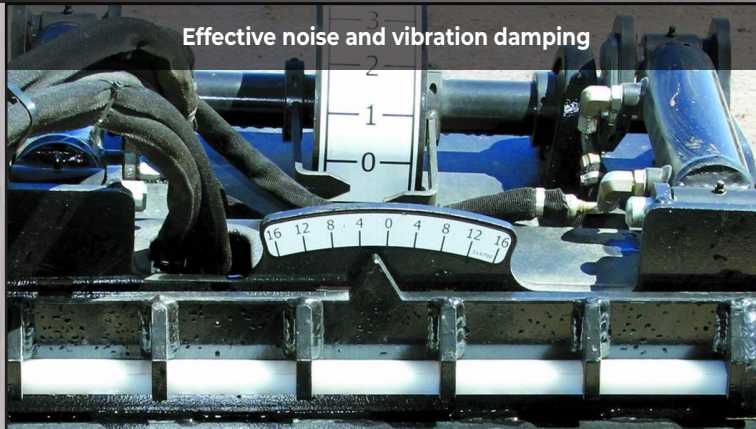

Effective noise and vibration damping



Power booster for high performance and low vibration



Hydraulic Breaker

Take a Picture of This QR Code With
Your Smart Phone to See it in Action



Planetary drum drive
generates higher torque
than direct drive packages

Electro-Tilt controls
allow operator to adjust the
position of the drum to match
exact job requirements


Radial piston **cam-lobe
direct-drive motor**

- Max Pressure (5,800 psi)
- Max Power 55 HP
- High Efficiency (90%)
- Very Low Noise

**Right & left side
skid shoes** can be
controlled independently
for uneven terrain

Solid drum design
creates fine, recyclable
aggregate — material moves
to rear of drum to prevent
re-milling of material

Hydraulic side-shift
allows planer to shift up
to 24" to the right for cuts
close to the curbs

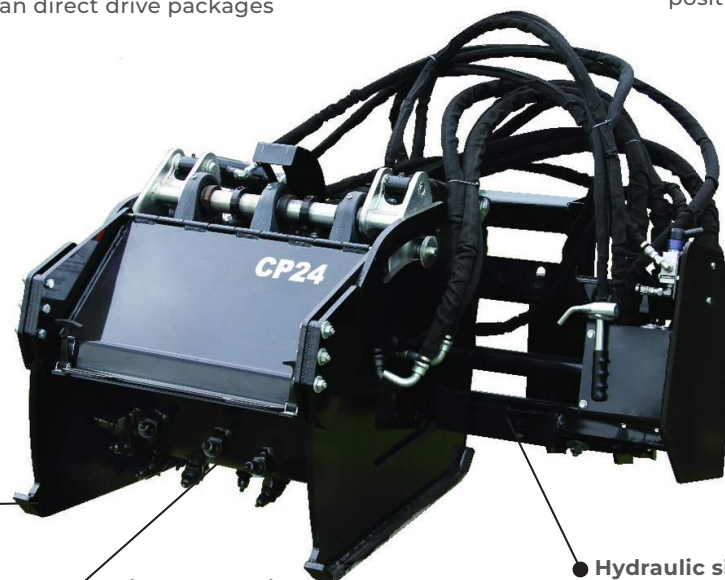

FEATURES & BENEFITS

- Adjustable to a wide variety of job environments including road construction, landscaping, bridge deck repair, municipal, shopping center, and utility work
- Easy to maneuver around manholes and storm drains; excellent for bridge decks where heavier dedicated planers are not allowed
- Side-Shift feature moves planer from left to right for maximum maneuverability
- Two tools in one; cut asphalt and concrete with the same machine

SPECIFICATIONS / OPTIONS

Model	CP18	CP24	CP36	CP48
Part Number	900938	900939	901430	901431
Depth of Cut	0-6"	0-6"	0-6"	0-6"
Width of Cut	18"	24"	36"	48"
Number of Teeth	48	60	78	90
Standard Side-Shift	24" Hydraulic	24" Hydraulic	24" Hydraulic	24" Hydraulic
Tilt	16°	16°	8°	8°
Hydraulic Requirement	22-56 GPM; 2,800-6,525 psi	25-56 GPM; 3,000-6,525 psi	25-112 GPM; 3,000-6,525 psi	25-112 GPM; 3,000-6,525 psi
Weight	1,600 lb.	1,750 lb.	2,550 lb.	2,800 lb.

Options

Bolt-On Rollers

Pistol Grip Control Harness

Loader Specific Wire Harness

Case Drain Coupler

Factory Installed Couplers

Factory Installed High Flow Couplers

* For more specification details please see our website www.erskineattachments.com