


Rear Mount PTO Snowblower



The Rear Mount PTO snowblower is designed to efficiently handle all types of snow conditions. With four standard widths to choose from, we have the right fit for your application.

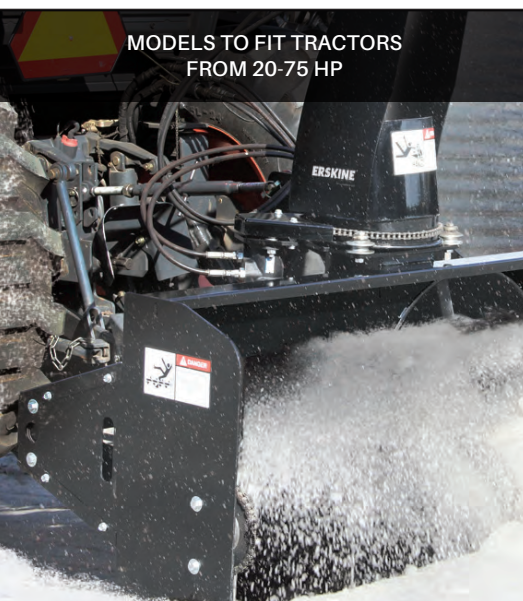

MODELS TO FIT TRACTORS
FROM 20-75 HP




QUICK MOUNTING BRACKETS
FOR EASY SWAPPING



OPTIONAL MOTOR FOR
HYDRAULIC CHUTE ROTATION

Take a Picture of This QR Code With Your Smart Phone to See it in Action

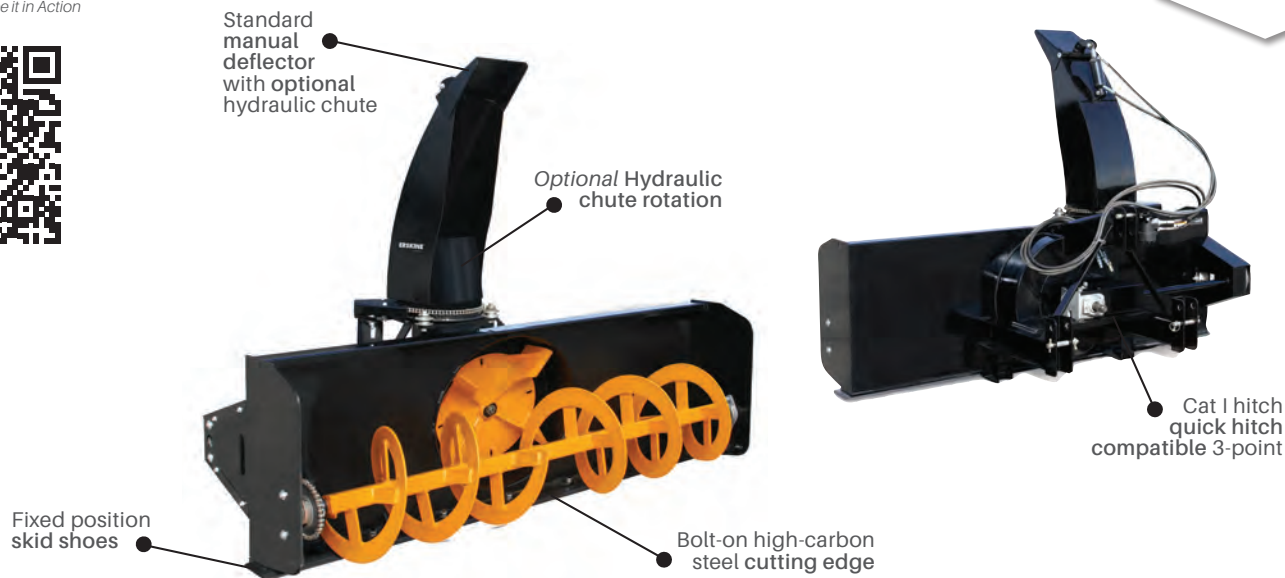

Models to fit tractors from 20 - 75 HP

FEATURES & BENEFITS

- 20" and 24" fan diameters
- Casts snow 30' - 35'
- Optional hydraulic chute rotation and deflector available
- Cat I quick hitch compatible 3-point

SPECIFICATIONS / OPTIONS

Model	520RM	620RM	725RM	825RM
Part Number	920140	920141	920142	920143
Stage	2	2	2	2
Working Width	54"	60"	72"	84"
Overall Width	56"	62"	74"	86"
Length	42"	42"	42"	42"
Height	63"	63"	67"	67"
Cutting Height	24"	24"	28"	28"
Fan Diameter	20" 4-blade	20" 4-blade	24" 4-blade	24" 4-blade
Auger Diameter	14" open flight	14" open flight	14" open flight	14" open flight
PTO Speed	540 RPM	540 RPM	540 RPM	540 RPM
Chute Rotation	180° manual (standard)	180° manual (standard)	180° manual (standard)	180° manual (standard)
270° hydraulic (optional)	270° hydraulic (optional)	270° hydraulic (optional)	270° hydraulic (optional)	Up to 30'
Cutting Edge	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on	5/8" x 6" bolt-on
Driveline Series	14	14	35	35
Casting Distance	Up to 30'	Up to 30'	Up to 40'	Up to 40'
HP Range	20-35 HP	20-35 HP	30-55 HP	40-65 HP
Hitch Category	Cat. I	Cat. I	Cat. I	Cat. I
Weight	635 lb.	660 lb.	750 lb.	800 lb.

Options

Hydraulic Chute Rotation / Hydraulic Deflector / Electric Deflector / Urethane Cutting Edge / Rubber Cutting Edge

* For more specification details please see our website www.erskineattachments.com

* For more specification details please see our website www.erskineattachments.com